

# Introduction

Congratulations on your purchase of a Satechi™ BT Wireless Pocket Speaker.

Satechi™ BT is a Bluetooth multimedia speaker which can be connected wirelessly to a Bluetooth mobile phone, a PDA or to a Bluetooth enabled computer. Once connected, you can stream stereo music from your phone or from your PC/Laptop to the Satechi™ BT.


## Safety Rules

1. Please follow the rules depicted in this manual closely to ensure your safety. Before using the speaker, we would strongly encourage you to read through this user manual
2. Be aware of any edges, uneven surfaces, metal parts, accessories and its packaging so as to prevent any possible injury or damage.
3. Keep this speaker out of reach of children. Take note that this speaker is not edible and should not be placed in your mouth.
4. Do not modify, repair or dismantle the speaker. Doing so may result in fires, electric shocks, complete breakdown of the speaker, etc. All of which, are not covered under warranty.
5. Do not use any diluents or volatile liquid to clean the speaker. Keep in mind that the surface of the speaker should only be wiped with a clean dry cloth.
6. Do not use this speaker in locations whereby there are high-temperatures or high humidity levels (For instance, bathrooms); ideally, the speaker should be used in a location free of dust and exposure to direct sunlight.
7. Do not insert foreign objects, such as pins, into this speaker.
8. Do not touch this speaker when your hands are wet as this may result in electric shocks.
9. Turn down the volume before/while using this speaker as sudden loud sounds may damage it.
10. Refrain from dropping the speaker as well as any collision with other objects.
11. Do not use this speaker when in hazardous locations.  
Should any abnormal situations or problems occur while using the speaker, discontinue use of speaker immediately.

# Getting Started

The Package contains the following:

- 1 x Satechi™ BT Wireless Pocket Speaker
- 1 x Protection Pouch
- 1 x USB Charging Cable
- 1 x User Manual

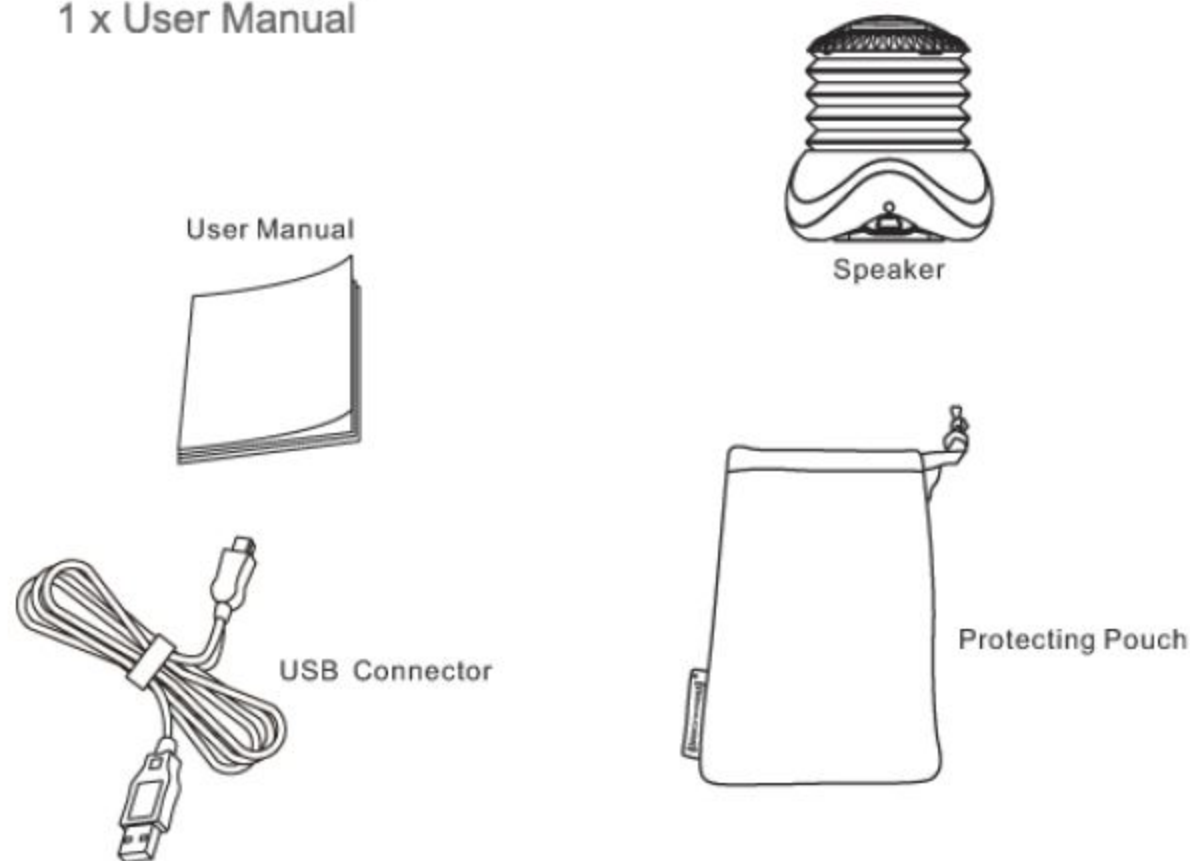

# Getting Started


The Package contains the following:

- 1 x Satechi™ BT Wireless Pocket Speaker
- 1 x Protection Pouch
- 1 x USB Charging Cable
- 1 x User Manual

User Manual



Speaker

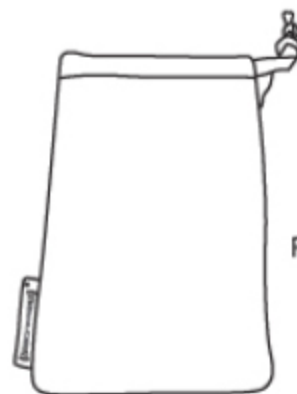


Protecting Pouch



USB Connector

# Connection Diagram

## ①. Bottom of the speaker

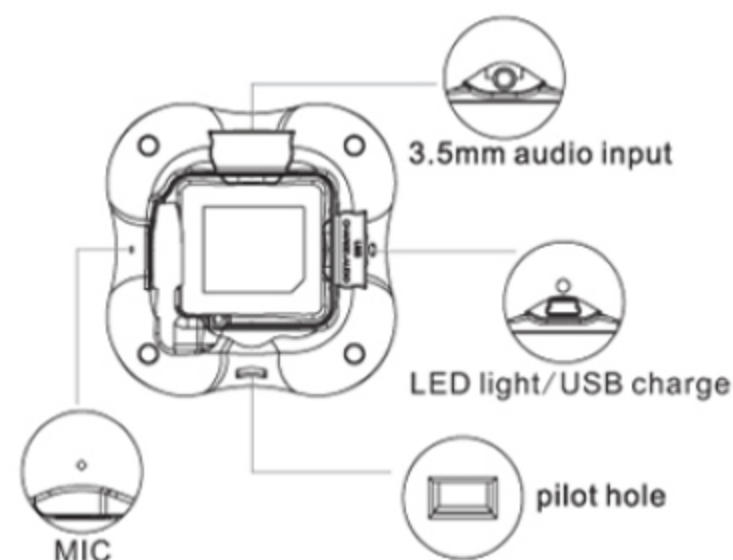

## ②. Face of the speaker




## ③. Closed resonator



## ④. Open resonator



## Charging

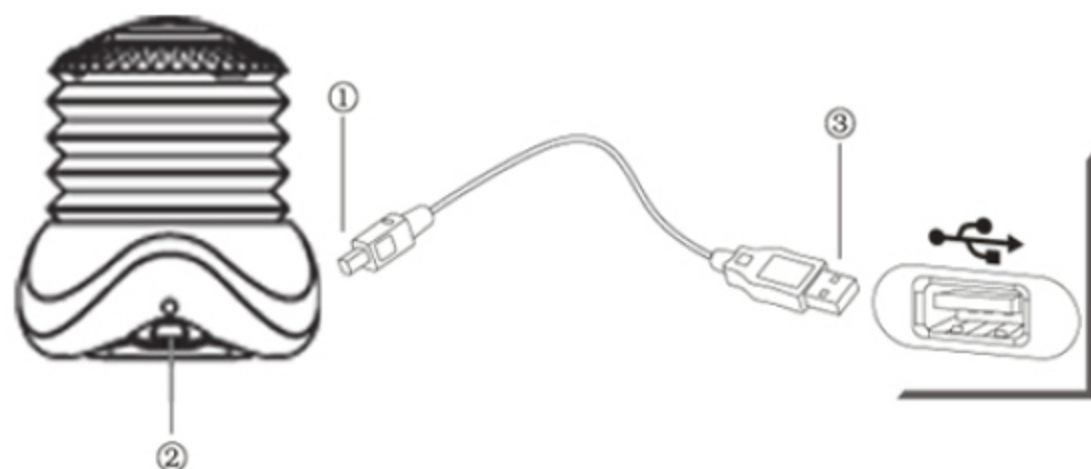

Before using the BT Speaker for the first time, you should charge it with the supplied cable for 4 hours.

1. Connect part 1 to 2 (mini-USB plug connects to BT Speaker)
2. Connect part 3 (USB Adaptor) to a free USB port located on your computer
3. LED indicator will be Red
4. LED will turn Blue to indicate fully charge of the BT Speaker

### **To turn on the speaker:**

Press and hold the on/off button (1) till the LED indicator turns Blue.


### **To turn off the speaker:**

Press and hold the on/off button (1) till the LED indicator turns off.

### **Note:**

Buttons are underneath the metal frame.

## Pairing BT Speaker

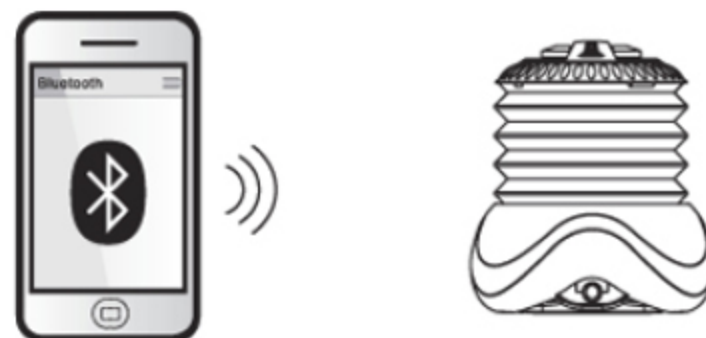

Before you can use the BT speaker, it must be paired with your phone once. After a successful pairing, the speaker automatically connects to your phone when it is turned on and within range.

### **To pair the speaker with your phone:**

1. Turn on the Bluetooth function in the phone. For instructions, refer to the phone user guide.
2. Place the phone within 20 cm (8 inches) of the speaker.
3. Turn on the speaker. The first time you do so, the speaker enters pairing mode automatically.
4. Add the speaker to your phone as described in your phone user guide. The passcode is 0000.

When you have paired the speaker with your phone, you can listen to music as long as the speaker is turned on and within 10 metres (33 feet) of the phone. Solid objects, walls and a greater distance than 5 metres (16.5 feet) can affect the sound quality negatively.



# Mode of Usage

## ***To Listen to music:***

If your phone supports A2DP, you can stream music from your phone to the BT Speaker. Go to your phone's music player and play a track. If the BT Speaker is connected, the music will be heard directly from the speaker. See your phone's manual if needed. On some phones, audio will be on the BT Speaker while other phones require you to select an output of your audio. In this case, select BT Speaker in the list you can reach from your phone's "listen via" or "play via" menu. Audio is now on the BT Speaker.

## ***To Answer/End call:***

While music is playing on the BT Speaker, you can still receive and answer calls on your phone. When a call gets through, music will be muted on the BT Speaker. You can answer the call by the tapping the Answer Call button (2) on the BT Speaker. You can end the call by the tapping the End Call button (1) on the BT Speaker.

## ***To Adjust volume:***


The volume can be adjusted by pressing and holding the volume up button (2) and volume down button (3) on the BT Speaker, at the music source, or at both.

## ***To Connect the speaker to other music equipment:***

Turn on the BT Speaker. Take out the built-in audio cable from the bottom of the BT Speaker and connect it to any multimedia device with a 3.5mm audio port. Tapping the Mode Change button (3) twice will activate the Line-in mode.

# Series Connection

This all new system enables you to connect one pair of Satechi™ BT Pocket Speaker to another, capable of forming virtually endless "daisy chain" of self-powered, bass-enhanced portable speaker system. You may also connect other pocket speakers into the "Buddy-Jack" to expand on volume or multi-functionality.

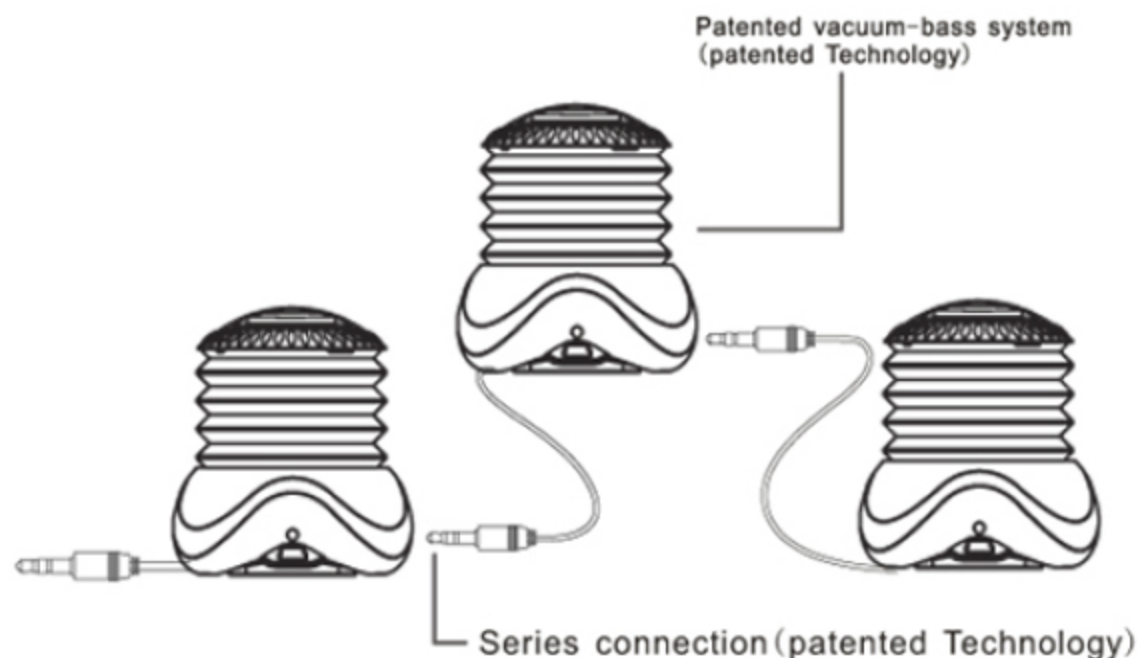

Connect other BT Speaker series into the Buddy-Jack to create jaw-dropping audio!

# Button Functions



There are 3 buttons on the BT Speaker, and each button has several functions. The following functions can be controlled using the buttons on the BT Speaker.

## Button 1

### **Power on/off:**

Press and hold Button 1 for a couple of seconds to turn on the BT Speaker. LED indicator will turn Blue. Press and hold Button 1 again to turn it off.

### **Play/Pause:**

To pause a track when the music is playing, press Button 1 and press again to play.


### **End Call:**

Press Button 1 to end an active call.

### **Reject a Call:**

Press Button 1 when the phone rings to reject an incoming call.

# Button Functions

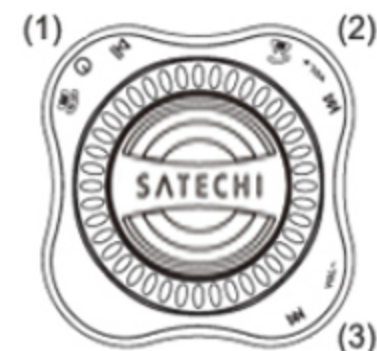

## Button 2

### **Next Track:**

To skip to the next track, press Button 2 while the music is playing.

### **Volume Up:**

Press and hold Button 2 to turn the volume up.

### **Answer Call:**

Press Button 2 to answer a call.

## Button 3

### **Previous Track:**

To skip to the previous track, press Button 3 while the music is playing.

### **Volume Down:**

Press and hold Button 3 to turn the volume down.

### **Mode Change:**

Pressing Button 3 twice rapidly will activate the Line-in mode.

## FAQ

1. Why is there no power when the power on/off button was held for few seconds?

Ans: Ensure the battery is being charged up to 4 hours. A battery that has been infrequently used, or a new battery could have reduces battery. It may need to be recharged a few times to reach full capacity.

2. There is no connection to the speaker.

Ans: Make sure the speaker is charged and within range of the phone. Check or redo the Bluetooth setting on the phone.

3. I cannot hear anything in my headset.

Ans: Increase the volume in the speaker. Ensure that the headset is paired to a device that is playing. Make sure your phone is connected to the headset.

4. I am having pairing problems.

Ans: You may have deleted your speaker pairing connection in your mobile phone. Follow the pairing instructions and try to pair again.

5. The bass production is very low.

Ans: The tube might be punctured. If so, please check warranty coverage.


6. How can I know that the speaker has been fully charged?

Ans: When the indicator LED turns from red to blue, it's been fully charged.

## Technical Specification

### Satechi™ SD Pocket Speaker

Dimension	: 68.5mm x 68.5mm x 42mm(Closed Mode)
Net Weight	: 94g
Speaker	: Magnetically Shielded 40mm
Input	: L/R380mV
Power Output	: 3W
Signal to Noise	: >70dB
Distortion	: <5.0%
AMP Freq Range	: 280Hz - 16KHz
Bluetooth Specification	: V2.1
RF Frequency Range	: 2402 ~ 2480 MHz
Transmission Power	: 0.25 ~ 2.5mW
Charge Voltage	: 5V +0.5V

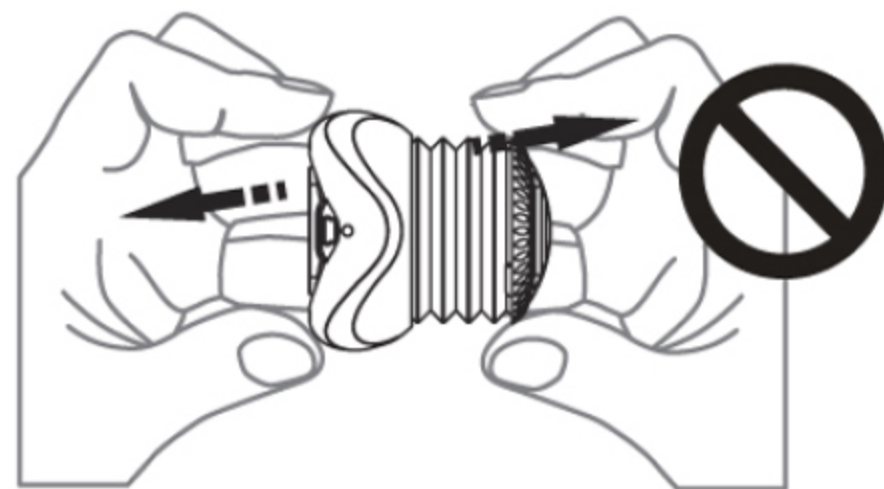

# Warranty

## Limited Warranty

If within 12 months of purchase this device or any part thereof is proven to be defective by reason of faulty workmanship or defects in materials we will at our option repair or replace the same free of charge of labor or materials on condition that:

1. This Limited Warranty is valid only if the original proof of purchase for this product issued by a Satechi™ specifying the date of purchase, is presented with the product to be repaired or replaced.
2. Satechi™ reserves the right to refuse warranty service if the original proof of purchase has been removed, changed or missing.
3. This Limited Warranty does not cover wear and tear of a rechargeable battery. The nature of a rechargeable battery can be charged and discharged more than a hundred times, eventually wear out is normal and this is not a defect.
4. This Limited Warranty does not cover Product failures which have been caused by use of accessories or other peripheral devices which are not Satechi™ branded original accessories intended for use with the product.
5. This Limited Warranty does not cover any damage caused by misuse, drop, hit or neglect.
6. This Limited Warranty does not cover product failures caused by modifications, repair or disassembly by any person not authorized by the manufacturer.
7. Any defective unit or part or product shall become property of the manufacturer.



**If you have any questions about your SATECHI product, please contact us first.  
Our friendly support staff is here to help.**

Thank you for choosing SATECHI. SATECHI is dedicated to supporting our customers. If you have any questions, comments or concerns about your SATECHI product, please contact us first.

Our staff of friendly and knowledgeable representatives is available to help you.

**Customer Support Telephone:**

**(858) 268 1800**

Monday - Friday	9:00 am to 5:00 pm PST
Saturdays	December only otherwise closed.
Sundays	Closed